



CASE 1

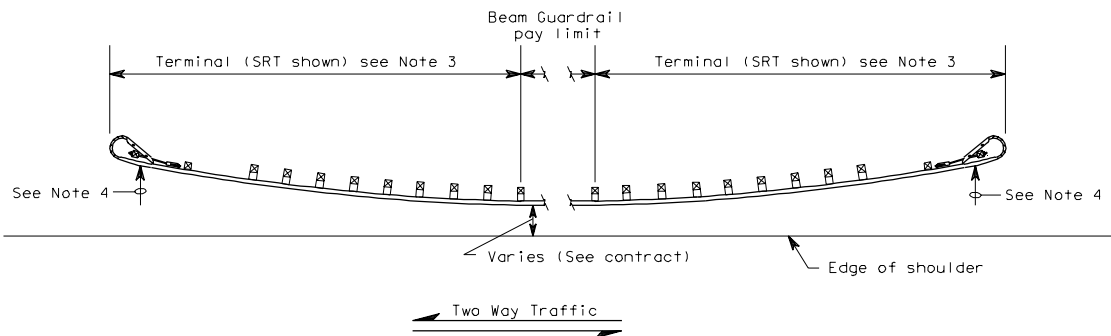

CASE 2

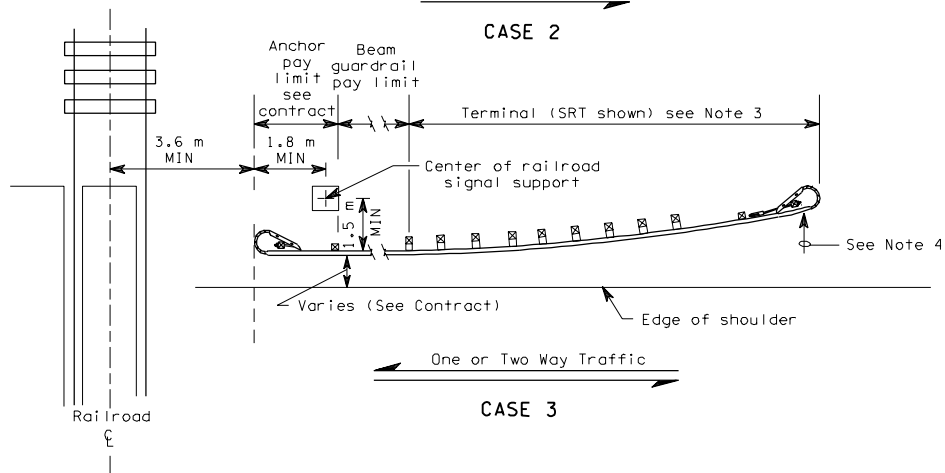

CASE 3

NOTES

1. Type 4 anchor required. For details, see applicable Standard Plan(s).
2. Post spacing is 1905 mm unless otherwise shown.
3. For Terminal type and details, see Contract Plans and applicable Standard Plan(s).
4. The slope from the edge of the shoulder into the face of the guardrail should not exceed 1:10 when the face of the guardrail is less than 3.6 meters from the edge of the shoulder.

ALL DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE NOTED

GUARDRAIL PLACEMENT

STANDARD PLAN C-2

APPROVED FOR PUBLICATION

STATE DESIGN ENGINEER

DATE

WASHINGTON STATE DEPARTMENT OF TRANSPORTATION
OLYMPIA, WASHINGTON